


Rotational Dynamics

Physics 1425 Lecture 19

Rotational Dynamics


- **Newton's First Law:** a rotating body will continue to rotate at constant angular velocity as long as there is no torque acting on it.
- Picture a grindstone on a smooth axle.
- BUT the axle must be *exactly* at the center of gravity—otherwise gravity will provide a torque, and the rotation will not be at constant velocity!

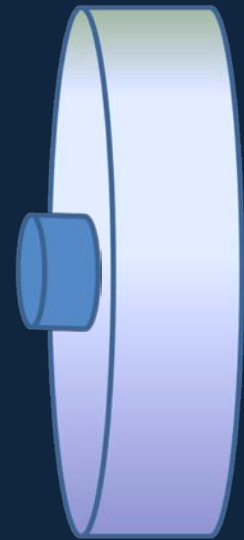

How is Angular Acceleration Related to Torque?

- Think about a tangential force F applied to a mass m attached to a light disk which can rotate about a fixed axis. (A *radially* directed force has zero torque, does nothing.)
- The relevant equations are:
 $F = ma$, $a = r\alpha$, $\tau = rF$.
- Therefore $F = ma$ becomes

$$\tau = mr^2\alpha$$

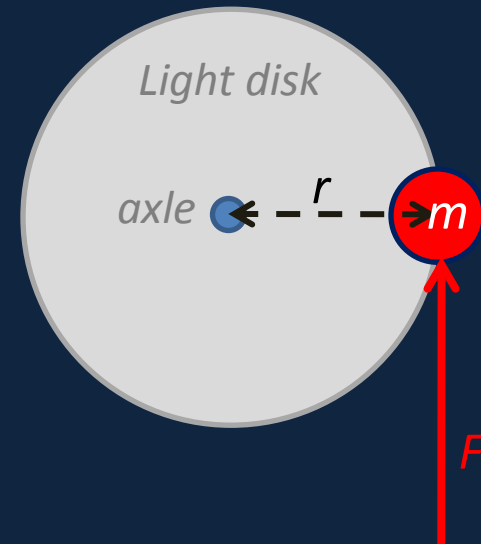


Newton's Second Law for Rotations

- For the **special case** of a mass m constrained by a light disk to circle around an axle, the angular acceleration α is proportional to the torque τ **exactly** as in the linear case the acceleration a is proportional to the force F :
- $\tau = mr^2\alpha \longleftrightarrow F = ma$

The angular equivalent of inertial mass m is the **moment of inertia** mr^2 .

More Complicated Rotating Bodies

- Suppose now a light disk has several different masses attached at different places, and various forces act on them. As before, radial components cause no rotation, we have a sum of torques.
- **BUT the rigidity of the disk ensures that a force applied to one mass will cause a torque on the others!**
- **How do we handle that?**

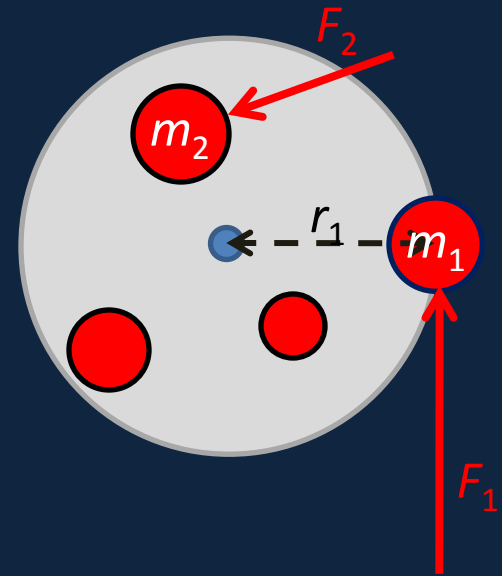

Newton's Third Law for a Rigid Rotating Body

- If a rigid body is made up of many masses m_i connected by rigid rods, the force exerted along the rod of m_i on m_j is equal in magnitude, opposite in direction and along the same line as that of m_j on m_i , therefore **the internal torques come in equal and opposite pairs, and cannot contribute to the body's angular acceleration.**
- It follows that the angular acceleration is generated by the sum of the **external** torques.

Moment of Inertia of a Solid Body


- Consider a flat square plate rotating about a perpendicular axis with angular acceleration α . One small part of it, Δm_i , distance r_i from the axle, has equation of motion

$$\tau_i = \tau_i^{\text{ext}} + \tau_i^{\text{int}} = \Delta m_i r_i^2 \alpha$$

- Adding contributions from all parts of the wheel


$$\tau = \sum_i \tau_i^{\text{ext}} = \left(\sum_i \Delta m_i r_i^2 \right) \alpha = I \alpha$$

- I is the **Moment of Inertia**.

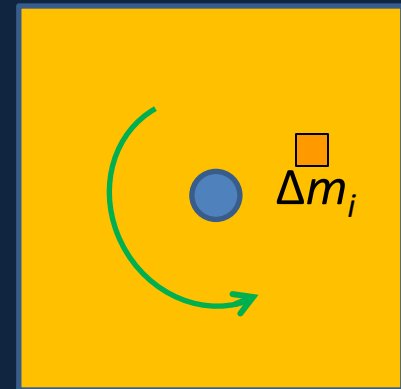

Problem From Book

- **51.** An *Atwood's machine* consists of two masses, m_A and m_B which are connected by a massless inelastic cord that passes over a pulley. If the pulley has radius R and moment of inertia I about its axle, determine the acceleration of the masses and compare to the situation in which the moment of inertia of the pulley is ignored. [*Hint: The tensions are not equal.*]

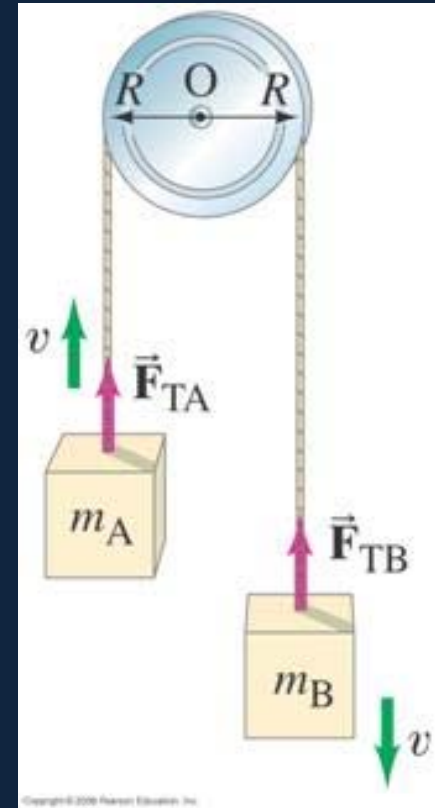



Calculating Moments of Inertia

- A **thin hoop of radius R** (think a bicycle wheel) has all the mass distance R from a perpendicular axle through its center, so its moment of inertia is

$$I = \sum_i \Delta m_i r_i^2 = MR^2$$

- A **uniform rod of mass M , length L** , has moment of inertia about one end


$$I = \int_0^L x^2 (M / L) dx = \frac{1}{3} ML^2$$

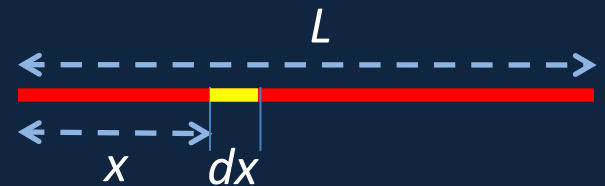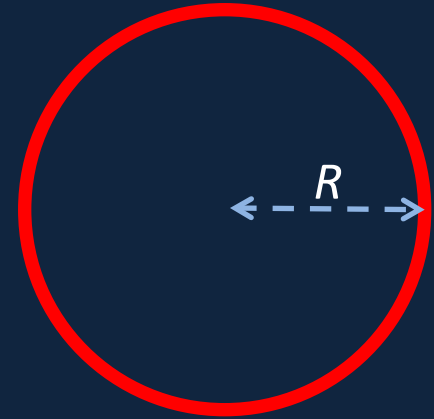

Mass of length dx of rod is $(M/L)dx$

Disks and Cylinders

- A disk: mass M , radius R , is a sum of nested rings.
- The **red ring**, radius r and thickness dr , has area $2\pi r dr$, hence mass $dm = M(2\pi r dr / \pi R^2)$.
- Adding up rings to make a disk,
$$I = \int_0^R r^2 dm = \int_0^R r^2 \left(2M / R^2 \right) r dr = \frac{1}{2} MR^2$$
- A cylinder is just a stack of disks, so it's also $\frac{1}{2} MR^2$ about the axle.

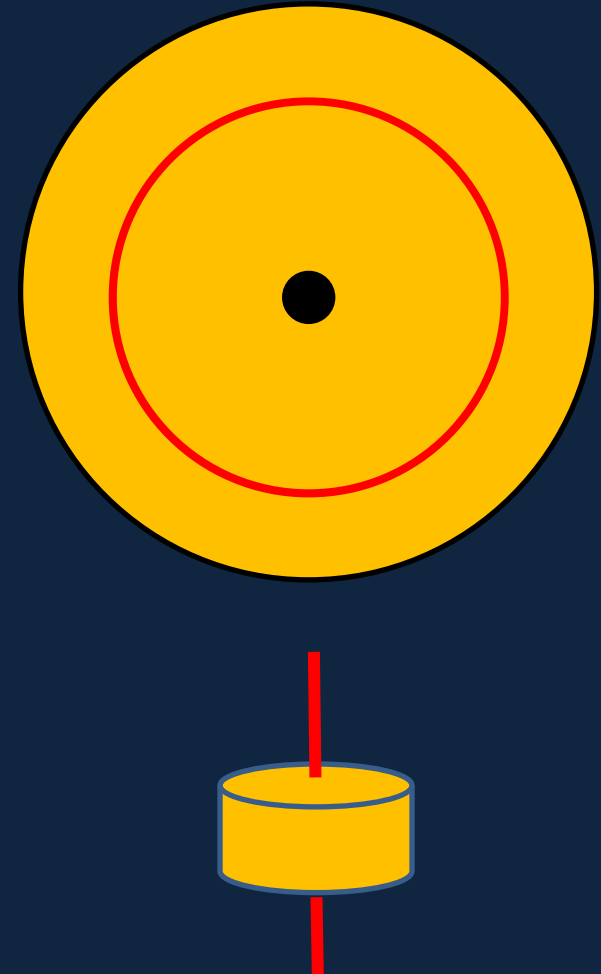

ConcepTest 10.8


Moment of Inertia

Two spheres have the same radius and equal masses. One is made of solid aluminum, and the other is made from a hollow shell of gold.


Which one has the bigger moment of inertia about an axis through its center?

- 1) solid aluminum
- 2) hollow gold
- 3) same

solid



hollow



same mass & radius

ConcepTest 10.8

Moment of Inertia

Two spheres have the same radius and equal masses. One is made of solid aluminum, and the other is made from a hollow shell of gold.

Which one has the bigger moment of inertia about an axis through its center?


1) solid aluminum

2) hollow gold


3) same

Moment of inertia depends on mass and distance from axis squared. It is bigger for the shell because its mass is located farther from the center.

solid

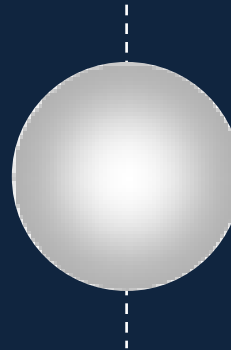

hollow

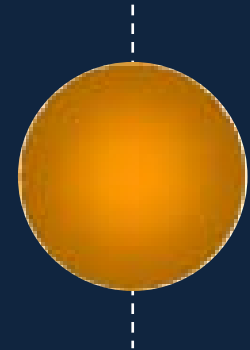

same mass & radius


Parallel Axis Theorem

- If we already know I_{CM} about some line through the CM (we take it as the z-axis), then I about a **parallel** line at a distance h is

- $$I = I_{\text{CM}} + Mh^2$$

- Here's the proof:

$$\begin{aligned} I &= \sum_i m_i \vec{r}_i^2 = \sum_i m_i (\vec{r}'_i + \vec{h})^2 \\ &= \sum_i m_i \vec{r}'_i{}^2 + 2\vec{h} \cdot \sum_i m_i \vec{r}'_i + M\vec{h}^2 \\ &= I_{\text{CM}} + Mh^2 \quad (\text{Since } \sum_i m_i \vec{r}'_i = 0.) \end{aligned}$$

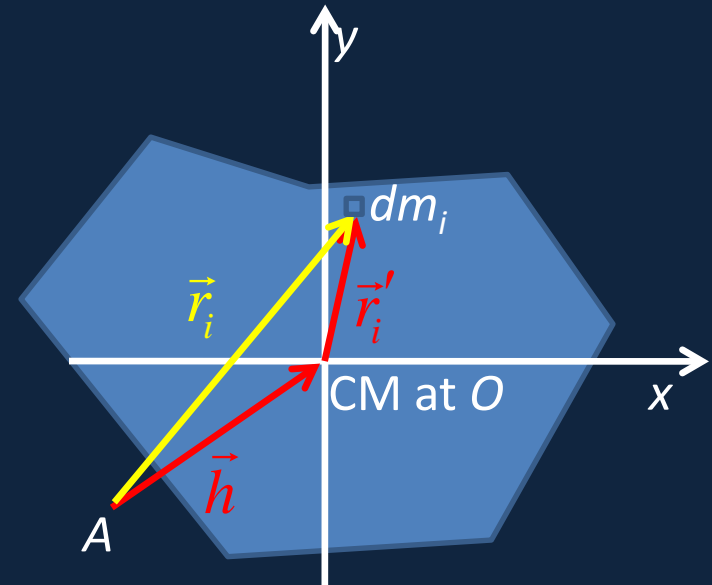

Moment of inertia I about perpendicular axis through A

- We prove it for a 2D object—the proof in 3D is exactly the same, taking the line through the CM as the z-axis.

Clicker Question

We found the moment of inertia of a rod about a perpendicular line through **one end** was $\frac{1}{3}ML^2$.

Use the **parallel axis theorem** to figure out what it is about a perpendicular line through the **center** of the rod.

A $\frac{1}{3}ML^2$

B $\frac{7}{12}ML^2$

C $\frac{1}{2}ML^2$

D $\frac{1}{4}ML^2$

E $\frac{1}{12}ML^2$

Clicker Answer

We found the moment of inertia of a rod about a perpendicular line through one end was $\frac{1}{3}ML^2$.

Use the **parallel axis theorem** to figure out what it is about a perpendicular line through the center of the rod.

A $\frac{1}{3}ML^2$

B $\frac{7}{12}ML^2$

C $\frac{1}{2}ML^2$

D $\frac{1}{4}ML^2$

E $\frac{1}{12}ML^2$

The moment of inertia about the CM is **less** than about any other parallel axis—the mass is closer to the axle on average.


Perpendicular Axis Theorem

- For a 2D object (a thin plate) the moment of inertia I_z about a perpendicular axis equals the sum of the moments of inertia about any two axes at right angles through the same point in the plane,

$$I_z = I_x + I_y$$

- Proof:

$$I_z = \sum_i m_i r_i^2 = \sum_i m_i (x_i^2 + y_i^2) = I_x + I_y$$

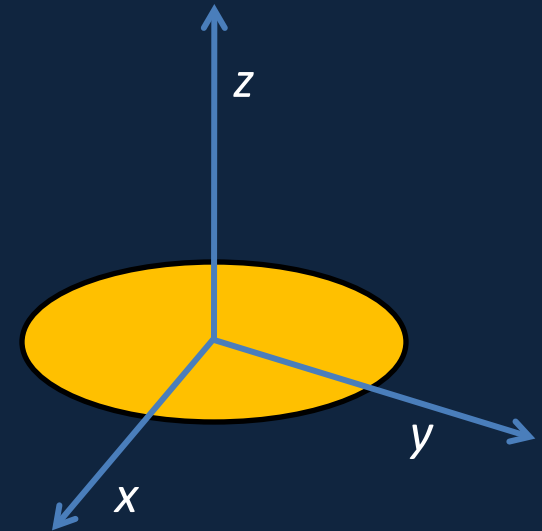


Clicker Question

Given that the moment of inertia of a disk about its axle is $\frac{1}{2}MR^2$, use the **perpendicular axis theorem** to find the moment of inertia of a disk about a line through its center and in its plane.

A $\frac{1}{2}MR^2$

B $\frac{1}{4}MR^2$

C MR^2

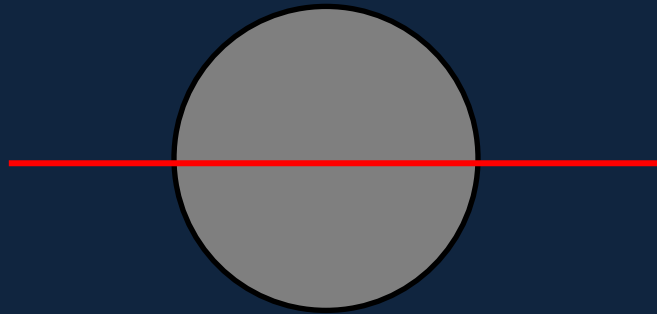


Clicker Answer

Given that the moment of inertia of a disk about its axle is $\frac{1}{2}MR^2$, use the **perpendicular axis theorem** to find the moment of inertia of a disk about a line through its center and in its plane.

A $\frac{1}{2}MR^2$

B $\frac{1}{4}MR^2$

C MR^2

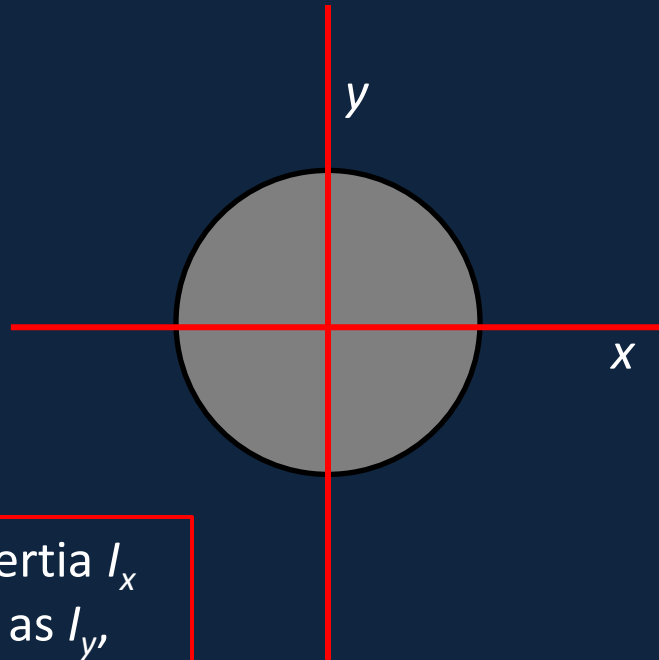

From symmetry, the moment of inertia I_x about the x-axis must be the same as I_y , and from the perpendicular axis theorem, $I_z = I_x + I_y$.

Rotational Kinetic Energy

- Imagine a rotating body as composed of many small masses m_i at distances r_i from the axis of rotation.
- The mass m_i has speed $v = \omega r_i$, so $KE = \frac{1}{2}m_i r_i^2 \omega^2$.
- The total KE of the rotating body (**assuming the axis is at rest**) is

$$K = \sum_i \left(\frac{1}{2} m_i r_i^2 \right) \omega^2 = \frac{1}{2} I \omega^2$$